

▶ Glance Features



LCD Screen Digital Controls

Clear display, easy to set temp and time. Time: 0-600s



Fahrenheit / Celsius Option

Put the calculator away. No more converting to your preferred setting. Temp: $210\text{-}400^\circ\text{F}$ / $100\text{-}205^\circ\text{C}$



Ergonomic Handle

Counterbalanced, back that mass up, ensure your smooth operation.



Evenly Heated Plate

Highly durable aluminum alloy, provide flawless transfers.



Insulated Antislip Base

Not only a placement to settle the machine also prevent your workbench away from scorch.



ireproof Design

Made with premium fire retardant ABS&PA.




Auto shutoff & Overheat protect

The machine shuts off automatically after 10 mins without operation.

Over heat protector is installed.

▶ Glance Features

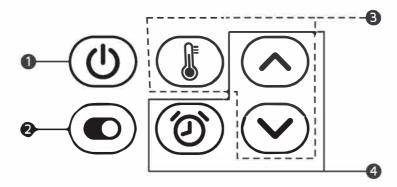

1 Power ON/OFF

Press to switch on the machine. Press again to turn off.

2 Timer Control

Press the button to start the countdown.

Set Temperature

Press $\{\!\!\}$ button, adjust value with plus $(\!\!\!\wedge\!\!\!\!\wedge)$ and minus $(\!\!\!\!\wedge\!\!\!\!\!)$ buttons, then press $\{\!\!\!\}$ to confirm. Long press the $\{\!\!\!\}$ button can switch from Fahrenheit to Celsius.

4 Set Time

Press 🕥 button, adjust value with plus (🔨) and minus (🔾) buttons, then press 🕥 to confirm.

TIPS: Temperature, time and pressure vary by base material and iron-on type.

Operation guide

- **A. Setting:** Plugin and switch on. Set the temperature and time according to different base materials and iron-on type.
- **B. Get prepared:** Made your workbench flat and stable. Use a heat-proof mat or a folded fluffy towel to protect your workbench surface.
- **C. Preheat the base material:** Place your base material on the mat/towel for 5 seconds to remove wrinkles and moisture.
- **D. Position and press**: Place your design wherever you want on the base material, place the machine on the design. Start the timer. Apply pressure until the machine beeps.
- **E. Flip and repeat:** Flip the base material and apply heat on the backside of the design for 15 seconds.
- If the transfer paper or heat transfer vinyl doesn't lift easily, reapply and reheat a few
- **F. Peel to finish:** Peel off transfer paper or HTV (Please make sure transfers are warm peel or cold peel).

NOTE

Please switch off the machine and unplug the power cord when the machine is not in use. It may be easy, but it's also HOT. Handle with care.

Smart Heat Press Machine

Thank you so much for purchasing!

▶ Troubleshooting

- **Q:** Why does the temperature not reach the set value and I press the Timer button, the machine begins to countdown, is it something wrong?
- **A:** Please don't worry, it is normal, after the temp reach your desired value (not setting value), you can press the Timer. Make sure that your temp reach the recommended settings.
- **Q**: What are the tips for successful transfers with Hobby Press?
- A: For perfect transfers that last, three things are important:
- 1. A firm, even surface. Iron boards and plastic tables can not provide a firm, even surface needed for successful transfers. We suggest you can use our silicone mat.
- 2. Use the recommended settings for the iron-on and base material you're using.
- 3. Make sure you apply firm pressure when transfer.
- Q: How hard do I have to press?
- **A:** Some applications call for "gentle" pressure, and some call for "firm" pressure. Firm pressure means press down with two hands and 15-40 lbs. of body weight. Gentle pressure means one hand with 5-15 lbs. of body weight. In all cases, a waist-high table is recommended for ease in applying the recommended pressure.
- **Q**: When pressed onto the garments, the color of the design is faded?
- **A:** Reason comes from three aspects, the pressure is too low, the temperature is not hot enough or the design has not been pressed for enough time. You may need to try more to get right temp, time and pressure.
- **Q:** I followed the instructions and my iron-on didn't stick. What happened? How do I get it to work?
- **A:** The most common reasons for your images not sticking:
- 1. Press machine did not make full contact with the base material. This could be because of seams, zippers or anything else that will cause you to not have a flat surface.

▶ Troubleshooting

- 2. Verify that your Press machine is set to the recommended settings.
- 3. Be sure heat has been applied to both the front and the back of the design for the recommended time.
- 4. Re-touch the front and back of material with heat for an additional 10-15 seconds.
- **Q:** The Press Machine temperature goes down when I apply it to the image. Is this something wrong?
- A: Press temperature may fluctuate briefly when placed on the base material after heating.

 This is due to the difference in temperature of the heated plate and the base material.


 Don't worry, the Machine temperature will quickly return to the selected setting.

 Your image adhesion will not be affected.
- $\mathbf{Q}\text{:}\ \mathsf{My}\ \mathsf{machine}\ \mathsf{keeps}\ \mathsf{turning}\ \mathsf{off},\ \mathsf{and}\ \mathsf{I}\ \mathsf{have}\ \mathsf{to}\ \mathsf{turn}\ \mathsf{it}\ \mathsf{back}\ \mathsf{on}.$ Why?
- **A:** This is the auto-shut off safety feature of Heat Press Machine. After 10 minutes of inactivity, or no button pushes, the device will alert you and then shut off.

Smart Heat Press Machine

HEAT PRESS User Manual

IMPRESSION

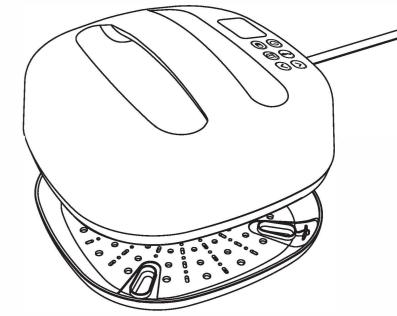

• Please read carefully before use